

FLS M9.02 FLOW MONITOR



The new FLS M9.02 is a powerful flow monitor designed to convert the frequency signal of FLS flow sensors into a flow rate. M9.02 is equipped with a wide full graphic display 4" which shows measured values clearly and a lot of other useful information. Moreover, due to a multicolor display plus a powerful backlight, measurement status can be determined easily from afar also. A tutorial software guarantees a mistake-proof and fast set up of every parameters. Calibration can be performed just fixing installation features or using a reference value through a new "in-line calibration". A 4-20mA output is available to remote flow rate to a external device. A proper combination of digital outputs allows customized setups for any process to be controlled.

APPLICATIONS

- Water treatment systems
- Industrial waste water treatment and recovery
- Water distribution
- Filtration systems
- Swimming pools & SPA
- Irrigation & Fertigation
- Leak detection
- Cooling water monitoring
- Processing and manufacturing industry
- Chemical production

MAIN FEATURES

- Wide full graphic display
- Multicolor backlight
- Help on board
- Installation flexibility
- Fast, intuitive and mistake-proof calibration software
- Mechanical relay for external device control
- Solid State Relays for programmable alarms
- Multilanguage menu



TECHNICAL DATA

General

- Associated sensors: FLS hall effect flow sensors with frequency output or FLS F6.60 flow magmeters
- Materials:
 - Case: ABS
 - Display window: PC
 - Panel & Wall gasket: silicone rubber
 - Keypad: 5-button silicone rubber
- Display:
 - LC full graphic display
 - Backlight version: 3-colours
 - Backlight activation: User adjustable with 5 levels of timing
 - Update rate: 1 second
 - Enclosure: IP65 front
 - Flow input range (frequency): 0÷1500Hz
 - Flow input accuracy (frequency): 0,5%

Electrical

- Supply Voltage: 12 to 24 VDC \pm 10% regulated
- FLS hall effect flow Sensor power:
 - 5 VDC @ < 20 mA
 - Optically isolated from current loop
 - Short circuit protected
- 1 x Current output:
 - 4-20 mA, isolated, fully adjustable and reversible
 - Max loop impedance: 800 Ω @ 24 VDC - 250 Ω @ 12 VDC
- 2 x Solid State Relay output:
 - User selectable as MIN alarm, MAX alarm, Pulse Out, Window alarm, Off
 - Optically isolated, 50 mA MAX sink, 24 VDC MAX pull-up voltage
 - Max pulse/min: 300
 - Hysteresis: User selectable

- 1 x Relay output:
 - User selectable as MIN alarm, MAX alarm, Pulse Out, Window alarm, Off
 - Mechanical SPDT contact
 - Expected mechanical life (min. operations): 10^7
 - Expected electrical life (min. operations): 10^5 N.O./N.C. switching capacity 5A/240VAC
 - Max pulse/min: 60
 - Hysteresis: User selectable

Environmental


- Operating temperature: -20 to +70°C (-4 to 158°F)
- Storage temperature: -30 to +80°C (-22 to 176°F)
- Relative humidity: 0 to 95% not condensing

Standards & Approvals

- Manufactured under ISO 9001
- Manufactured under ISO 14001
- CE
- RoHS Compliant
- GOST R

WIRING CONNECTIONS

Rear Terminal View

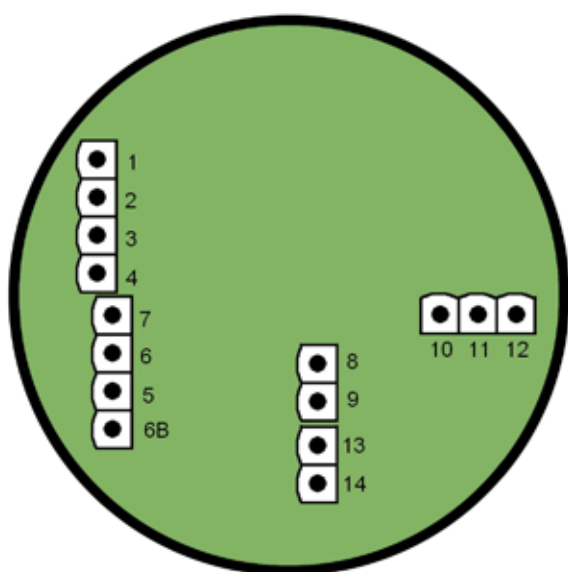

1	+VDC
2	+LOOP
3	-LOOP
4	-VDC

Power Supply

7	V+
6	FREQ IN
5	GND
6B	DIR

Flow Sensor

8	NO
9	COM

SSR1

10	NC
11	COM
12	NO

RELAY

13	NO
14	COM

SSR2

ORDERING DATA

M9.02 Flow Monitors						
Part No.	Description /Name	Power supply	Wire power Technology	Sensor Input	Output	Weight (gr.)
M9.02.P1	Panel mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	500
M9.02.W1	Wall mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	550
M9.02.W2	Wall mount Flow monitor	110 - 230 VAC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	650

M9.02 Flow Monitors Field mount								
Part No.	Description /Name	Power supply	Wire power Technology	Sensor Input	Output	Lenght	Main Wetted Materials	Weight (gr.)
M9.02.01	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L0	PVCC/EPDM	550
M9.02.02	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L0	PVCC/FPM	550
M9.02.03	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L1	PVCC/EPDM	550
M9.02.04	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L1	PVCC/FPM	550
M9.02.05	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L0	PVDF/EPDM	550
M9.02.06	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L0	PVDF/FPM	550
M9.02.07	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L1	PVDF/EPDM	550
M9.02.08	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L1	PVDF/FPM	550
M9.02.09	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L0	SS316L/EPDM	600
M9.02.10	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L0	SS316L/FPM	600
M9.02.11	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L1	SS316L/EPDM	600
M9.02.12	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L1	SS316L/FPM	600
M9.02.13	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L0	BRASS/EPDM	600
M9.02.14	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L0	BRASS/FPM	600
M9.02.15	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L1	BRASS/EPDM	600
M9.02.16	Field mount Flow monitor	12 - 24 VDC	3/4 wire	Flow (Frequency)	1*(4-20mA), 2*(S.S.R.), 1*(mech. relay)	L1	BRASS/FPM	600